



ARKANSAS
BUREAU OF
STANDARDS

4608 W. 61st Street
Little Rock, AR 72209
Bureau@aspb.ar.gov
Phone (501)-570-1159

SECURITY SEAL POLICY

Arkansas Annotated Code 4-18-344 (d) (2) states:

A registered service company shall provide security seals approved by the bureau to any individual employed as a registered technician authorized to perform inspections and tests.

Arkansas Annotated Code 4-18-344 (d) (3) states:

A registered technician shall place an approved security seal on the device to prevent any unauthorized access to the adjusting mechanism unless otherwise authorized by the bureau.




To qualify to perform annual inspections and tests a registered agency or agent shall submit a seal, as specified below, to the Bureau of Standards for approval. The registered service agency's approved security seal shall be on file with the Director of the Bureau of Standards.

The following specifications shall apply to the type and design of the required wire security seal:

Wire: Sufficient in length to provide security and the ability to readily observe the identity of the service company and the assigned Bureau registration number.
Shall be a 3-ply braided stainless steel wire.
Temperatures resistance of -20° C to 85° C
Diameter: 0.81mm
Corrosion resistant in exposed conditions

Seal: Constructed of polypropylene and such design to prevent tampering without destruction.
Seal diameter: not less than .55" (14mm)
Logo diameter: not less than .47" (12mm)
Logo side one: Initials ARWM
Logo side two: Bureau assigned registration number

Color: Seal mechanism shall have a bright reflective yellow background with block style letters.

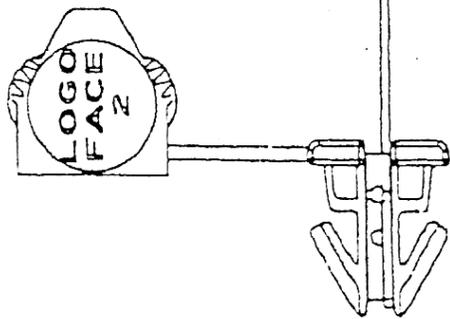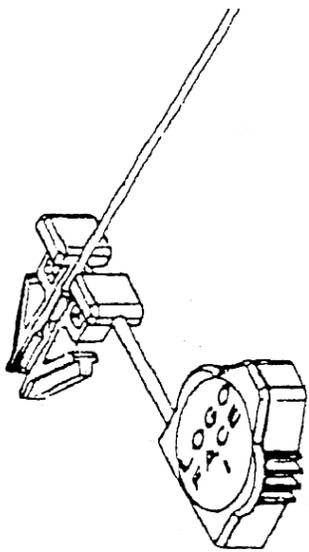

18"

